

primo

COMPACT

WATER RESERVOIR

INSTALL & USE

westomatic
make it happen



INSTALL WATER RESERVOIR

The water reservoir allows the machine to be used without mains water connection:

- External Dimensions Water Reservoir:
W230xD420xH455mm
- External Dimensions Total:
W530xD515xH600mm
- Capacity Water Reservoir:
8.2litres/5.2litres with the Filter



Parts Included:

Check the contents:

- Water Reservoir
- Water Container
- Water Hose
- Hose Connector x2
- Internal Power cable (red & purple wire)
- Power cable (black)
- User manual
- Brita Filter & cartridge (optional use)
- OPTIONAL: Ingredient Box
PN: 1057339



NB: The machine will have been set up to your specifications and tested at Westomatic HQ prior to install. All parts have been assembled on the machine. The QR code inside the machine gives access to the We:Support pages with technical information.

1

Place the Water reservoir on a level surface
Min Clearances:
Rear: 50mm




2

Ensure the protective plastic is removed from the top




3

Switch off and UNPLUG the Primo Compact from the mains power

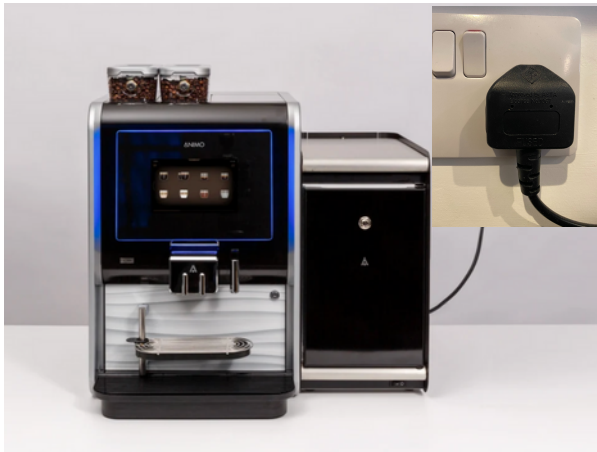

4

Remove the screws from the back cover

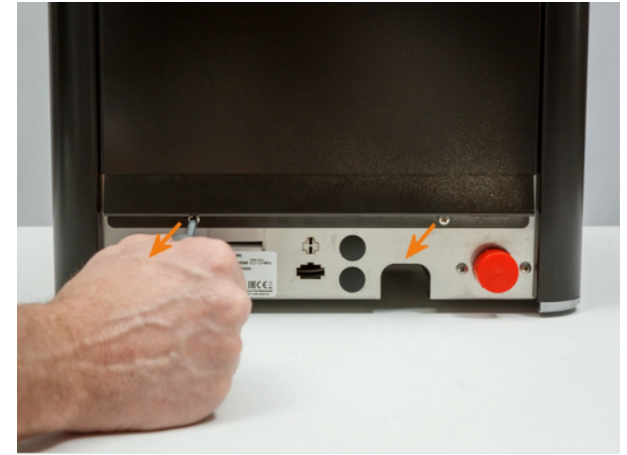

5

Remove the cover plate for the power cable feed through




6

Locate the power pins - remove the red and purple wire connectors



7

Connect the internal power cord to the plugs Red-Red/Purple-Purple

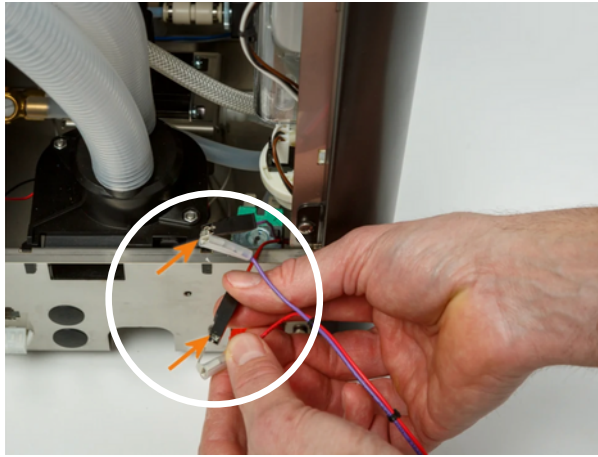


10

Replace the back cover - and fasten the two screws



8

Place plugs back on power pins

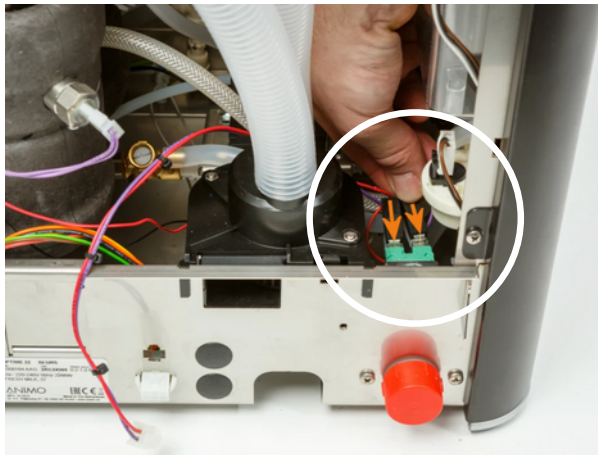


11

Remove the red cover from the water entry on the Primo



9

Guide the internal power cable to the opening in back cover and push through

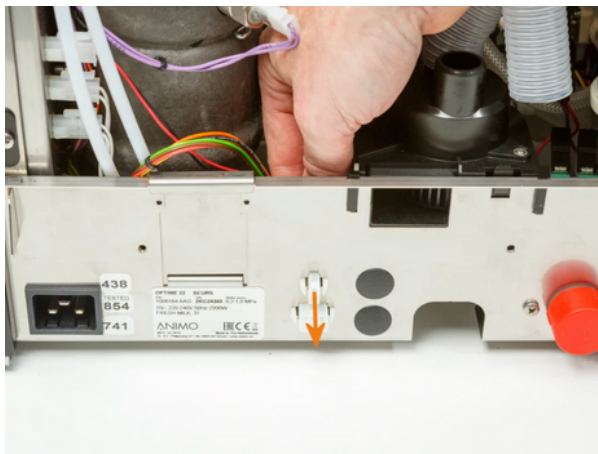

12

Attach water connector and tighten



13

Insert the water hose in the connector




14

Insert water hose into the water connector and then attach to the water reservoir



15

Connect the Primo and the water reservoir with the external power cable

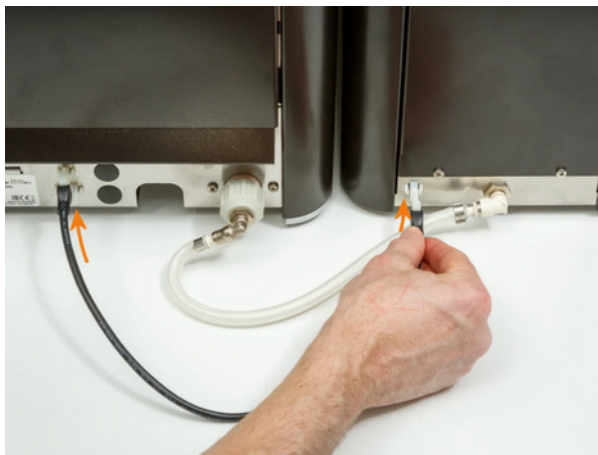

16

Connect the Primo to the power outlet and Switch on



17

Water Reservoir is now installed



USING THE RESERVOIR:

These instructions show how to commission the reservoir to use :

- Ensure the Water Reservoir is clean before every refill
- The reservoir is dishwasher safe to max 50°C
- NB. The Brita filter lid should be cleaned by hand (if using)



1

Fit filter into the Brita Filter lid
(If using)



2

Fill container with water:
8.2litres Total
(5.2liters with filter)



3

Close the lid



4

Place the water tank into the unit and push to the back



5

There is space under the tank for spare water filters




6

On the main screen select the Main Menu




7

Select OPERATOR
MENU

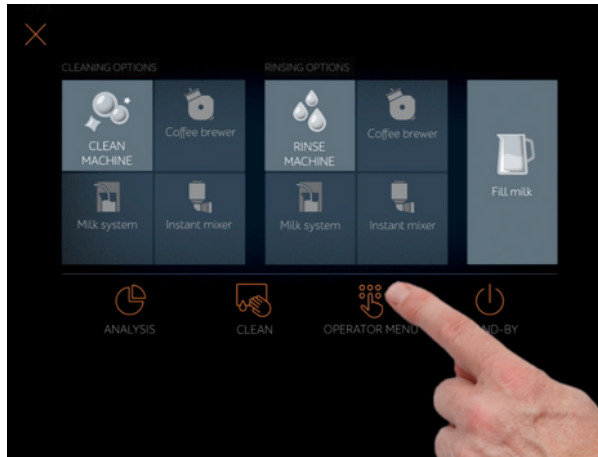


8

Enter Operator
Pin-Code
Default = 11111

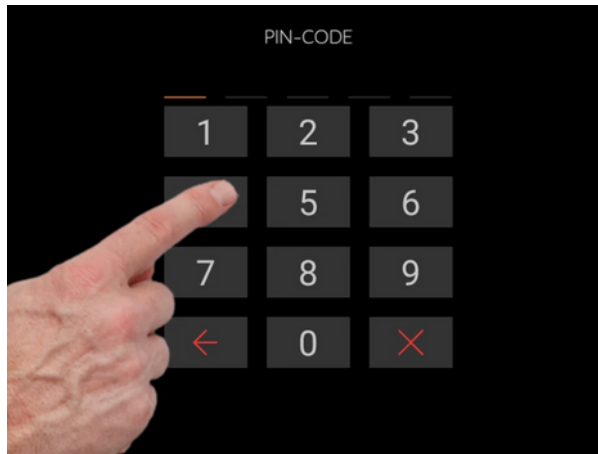


9

Choose
SERVICE MENU
(1.07)

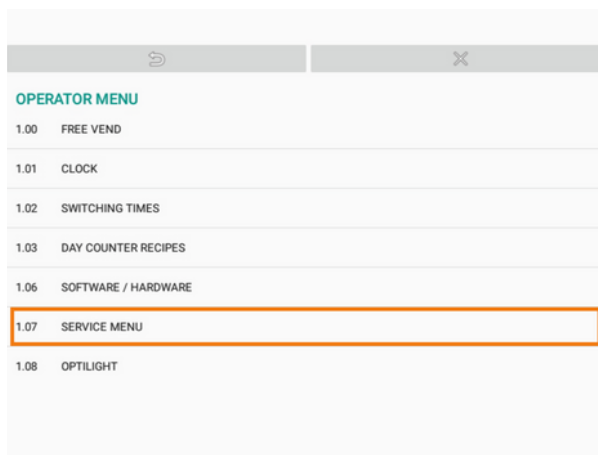


10

Enter Pin-Code
again to enter
Service Menu

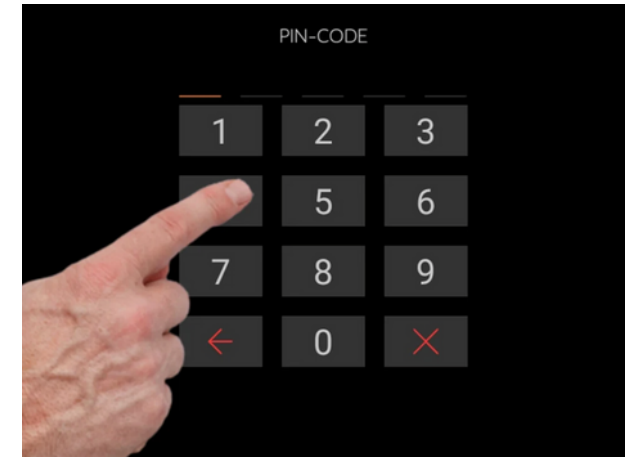


11

Select SETTINGS
(2.04)
Select EXTERNAL
WATER TANK
(2.04.19)

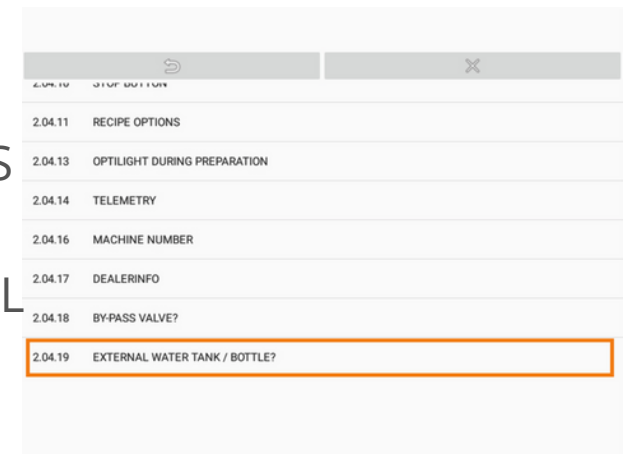

12

Switch to
ACTIVE,
Select WATER
RESERVOIR,
Press SAVE

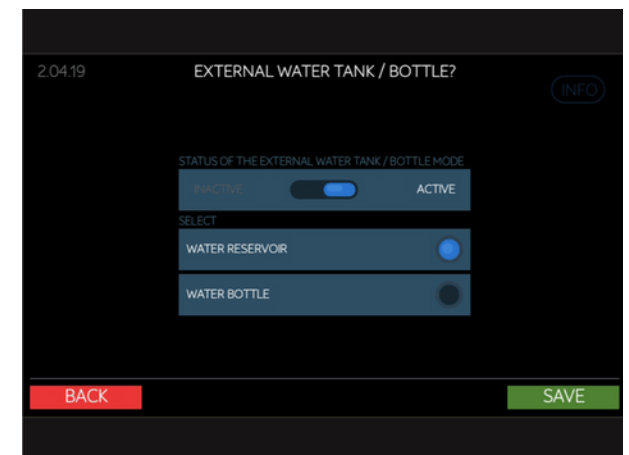

Water Reservoir is now set up and ready to use.

It is possible to use both the Water Reservoir and the Fresh Milk Fridge at the same time for the full experience.





CONTACT



Westomatic Vending
Services Ltd,
Units 7 - 8 Forde Court,
Block 4 Forde Road,
Newton Abbot,
TQ12 4BT

prigo



westomatic
British Vending Excellence Since 1964



+44 (0)1626 323100



sales@westomatic.com



www.westomatic.com